


COVER PER SUBMITTAL

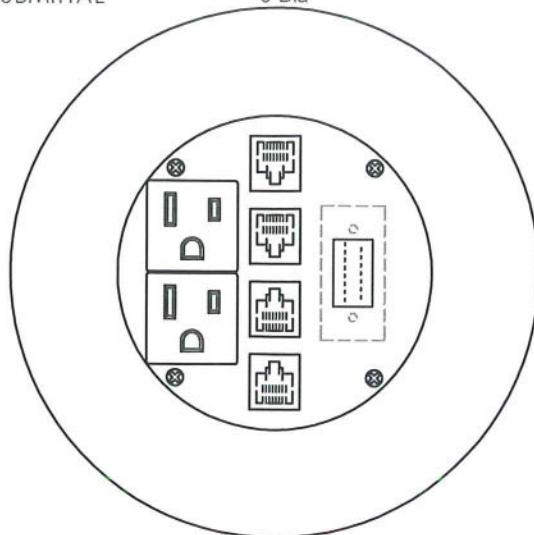

TOP VIEW


MOI-SLB-PWR2-COMM4-DB15

2 single receptacle, 4 openings for COMM jacks and 1 opening for DB (openings suitable for all manufacturers Keystone style jacks) COMM jacks and DB15 not supplied or installed by Nocom Inc.

NOTE:


Single receptacle 5-15RA shown. 5-20RA available

CROSS SECTION

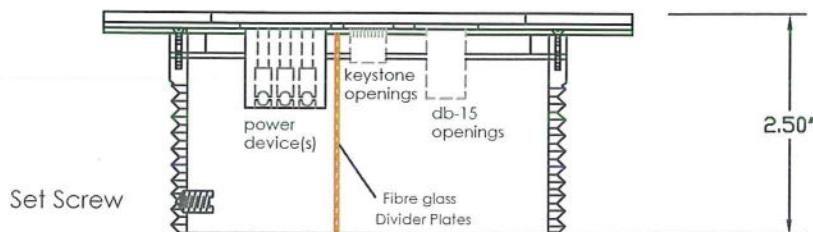


DEVICE MOUNTING BRACKET
C/W THREAD HUB AS SHOWN

Poured in slab

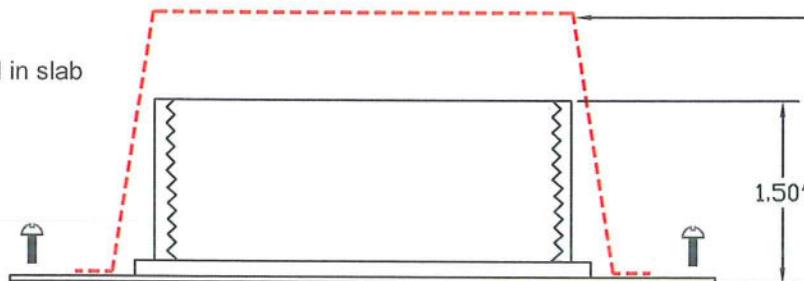

8"x8" SCREW ON COVER (4 CORNERS)
C/W THREAD HUB AS SHOWN
MOUNT +1"min. to 2" max.BELOW NEW TILE

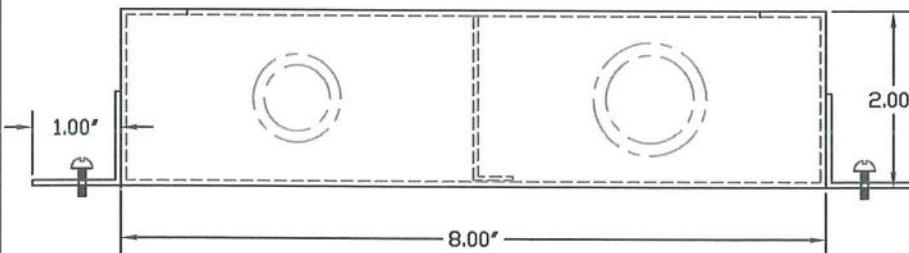

8"x8"x2" STANDARD BOX
WITH CENTRE BARRIER
C/W 2x[1 1/2-3/4"] k.o's
2x[3/4"-1"] k.o's

NOTE:

Single receptacles shall be CSA / UL Recognized/Classified or Listed Keystone style openings, blanks or CSA/UL Recognized/ Classified or Listed comm jacks

ORDERING INFO-(SEE ABBREVIATIONS)

SLAB THICKNESS _____

RECEPT.TYPE/colour _____

DATA MANUF./colour _____

COVER TYPE _____

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
NOCOM. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF NOCOM
IS PROHIBITED.

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: \pm DEGREE LINEAR: \pm MM (UNLESS SPECIFIED)		NAME	DATE (yy-mm-dd)	JOB TITLE:
			DRAWN	TJP	10-03-02	
			CHECKED			
			ENG. APPR.			
			MFG APPR.			
		MATERIAL See Variant table	Q.A.			
			COMMENTS:			
NEXT ASST	USED ON	FINISH				
APPLICATION		DO NOT SCALE DRAWING				
DWG. NO.		SIZE A MOI-SLB-PWR2-COMM4-DB15			REV. F	
SCALE=n.t.s.			WEIGHT:		SHEET 1 OF 1	

L LEW ELECTRIC
FITTINGS COMPANY

877-537-2019 www.lewelectric.com